


# Triple Claw Blind Rivets (light weight construction) Domed Head

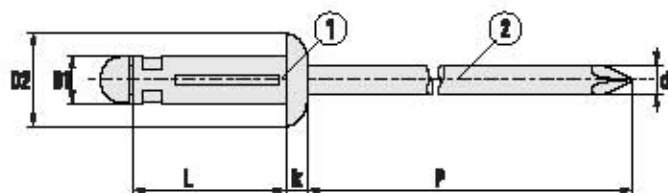

- ① Aluminium AlMg 2.5
- ② Aluminium AlMg 5

## Ø 4,0 mm

$$D1 = 4,0 + 0,08 f - 0,15 \text{ mm}$$

$$D2 = 8,0 + 0 f - 1 \text{ mm}$$

$$k = 1,4 + f - 0,3 \text{ mm}$$

$$d = 2,5 \text{ mm}$$

$$P \geq 27 \text{ mm}$$

$$L = +1 f - 0,2 \text{ mm}$$

$$\text{---} = 4,2 - 4,4 \text{ mm}$$

4,0 x 13,6 mm	1,0 - 3,0 mm	AAD 40136 DL	500	500 N	800 N
4,0 x 18,8 mm	3,0 - 7,0 mm	AAD 40188 DL	500		
4,0 x 24,0 mm	5,0 - 11,0 mm	AAD 40240 DL	500		

## Ø 4,8 mm

$$D1 = 4,9 + 0,10 f - 0,15$$

$$D2 = 9,6 + f - 0,29$$

$$k = 1,6 + f - 0,35$$

$$d = 2,9$$

$$P \geq 27$$

$$L = +1 f - 0,2$$

$$\text{---} = 5,0 - 5,2 \text{ mm}$$

4,8 x 15,3 mm	1,0 - 3,0 mm	AAD 48153 DL	500	800 N	1100 N
4,8 x 20,5 mm	3,0 - 9,0 mm	AAD 48205 DL	500		
4,8 x 24,5 mm	5,0 - 12,0 mm	AAD 48245 DL	500		