


High-Strength Blind rivets Domed Head

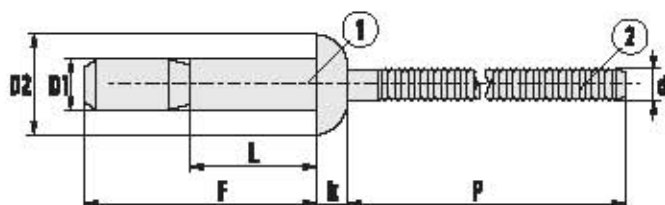

- ① Aluminium AlMg 5 (5056)
- ② Aluminium AlZnMgCu 1.5 (7A03)

Ø 4,8 mm

$D1 = 4,8 \text{ mm}$
 $D2 = 10,0 + 0 / -1 \text{ mm}$
 $k = 2,2 + / - 0,25 \text{ mm}$
 $d = 3,0 \text{ mm}$
 $P \geq 27 \text{ mm}$
 $L = + / - 0,99 \text{ mm}$
 = 4,9 - 5,1 mm

| | F max | | CODE | | | |
|-------------|---------|---------------|--------------|-----|--------|--------|
| 4,8 x 10 mm | 18,5 mm | 1,6 - 6,9 mm | AAD 04810 CL | 250 | 2400 N | 2000 N |
| 4,8 x 14 mm | 25 mm | 1,6 - 11,0 mm | AAD 04814 CL | 250 | | |

Ø 6,4 mm

$D1 = 6,4 \text{ mm}$
 $D2 = 13,5 + 0 / -1,5 \text{ mm}$
 $k = 3,0 + / - 0,4 \text{ mm}$
 $d = 4,0 \text{ mm}$
 $P \geq 31 \text{ mm}$
 $L = + / - 0,99 \text{ mm}$
 = 6,6 - 6,9 mm

| | F max | | CODE | | | |
|-------------|---------|---------------|--------------|-----|--------|--------|
| 6,4 x 14 mm | 25,5 mm | 2,0 - 9,5 mm | AAD 06414 CL | 250 | 5600 N | 3600 N |
| 6,4 x 20 mm | 36 mm | 2,0 - 15,9 mm | AAD 06420 CL | 250 | | |