


# Blind Rivet Nuts (Inserts) reduced Head

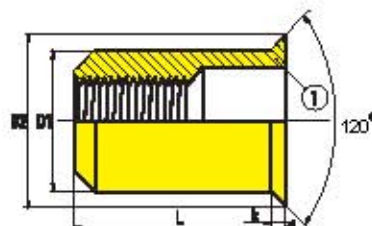

Round shank  
open type

① Steel zinc plated

## M 3

D1 = 4,9 mm  
D2 = 5,8 +/- 0,3 mm  
k = 0,5 +/- 0,2 mm  
L = +/- 0,2 mm

M3 X 8,8 mm	0,5 - 2,0 mm	XYZ M3X9.0	250	2,8 Nm	1430 N	2500 N	
M3 X 11,0 mm	2,0 - 3,0 mm	XYZ M3X11.0	280	2,8 Nm	1430 N	2500 N	

= 5 mm

## M 4

D1 = 5,9 mm  
D2 = 7,0 +/- 0,3 mm  
k = 0,5 +/- 0,2 mm  
L = +/- 0,2 mm

M4 X 10,5 mm	0,5 - 2,5 mm	XYZ M4X10.5	280	2,8 Nm	2720 N	5050 N	
M4 X 13,0 mm	2,0 - 4,0 mm	XYZ M4X13.0	280	2,8 Nm	2720 N	5050 N	

= 6 mm

## M 5

D1 = 6,9 mm  
D2 = 8,2 +/- 0,3 mm  
k = 0,5 +/- 0,2 mm  
L = +/- 0,2 mm

M5 X 12,5 mm	0,5 - 2,5 mm	XYZ M5X12.5	290	5,8 Nm	3330 N	3400 N	
M5 X 15,0 mm	2,5 - 4,0 mm	XYZ M5X15.0	290	5,8 Nm	3330 N	3400 N	

= 7 mm

## M 6

D1 = 8,9 mm  
D2 = 10,5 +/- 0,3 mm  
k = 0,6 +/- 0,2 mm  
L = +/- 0,2 mm

M6 X 14,0 mm	0,5 - 3,0 mm	XYZ M6X14.0	280	10,4 Nm	5000 N	9340 N	
M6 X 17,0 mm	2,0 - 5,0 mm	XYZ M6X17.0	280	10,4 Nm	5000 N	9340 N	

= 9 mm

## M 8

D1 = 10,9 mm  
D2 = 12,4 +/- 0,3 mm  
k = 0,7 +/- 0,2 mm  
L = +/- 0,2 mm

M8 X 17,0 mm	0,5 - 3,0 mm	XYZ M8X17.0	260	15,8 Nm	6600 N	10300 N	
M8 X 19,0 mm	2,0 - 5,0 mm	XYZ M8X19.0	260	15,8 Nm	6600 N	10300 N	

= 11 mm

## M 10

D1 = 11,9 mm  
D2 = 13,6 +/- 0,3 mm  
k = 0,8 +/- 0,2 mm  
L = +/- 0,2 mm

M10 X 19,0 mm	0,5 - 3,0 mm	XYZ M10X21.0	280	17,8 Nm	9100 N	14210 N	
M10 X 21,0 mm	2,0 - 5,0 mm	XYZ M10X21.0	280	17,8 Nm	9100 N	14210 N	

= 12 mm

Note: D1=12.9 mm also available upon request.