


Blind Rivet Nuts (Inserts) reduced Head

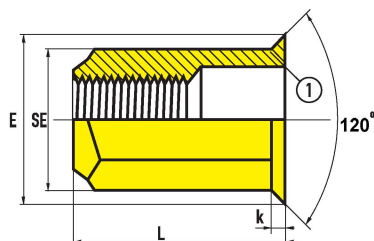

Hexagonal shank
open type

① Steel zinc plated

M 4

SW = 6 mm
SW1 = 6,1 mm (SW + 0,1 mm)
SE = 6,8 mm
E = 7,0 +/- 0,3 mm
k = 0,5 +/- 0,2 mm

M4 X 11,0 mm	0,5 - 2,5 mm	XQL M4X11.0	250	4,0 Nm	2700 N	5700 N	

M 5

SW = 7 mm
SW1 = 7,1 mm (SW + 0,1 mm)
SE = 7,9 mm
E = 8,0 +/- 0,3 mm
k = 0,5 +/- 0,2 mm

M5 X 14,0 mm	0,5 - 2,5 mm	XQL M5X14.0	250	8,0 Nm	3280 N	8600 N	

M 6

SW = 9 mm
SW1 = 9,1 mm (SW + 0,1 mm)
SE = 10,2 mm
E = 10,0 +/- 0,3 mm
k = 0,6 +/- 0,2 mm

M6 X 16,0 mm	0,5 - 3,0 mm	XQL M6X16.0	250	11,7 Nm	4100 N	11200 N	

M 8


SW = 11 mm
SW1 = 11,1 mm (SW + 0,1 mm)
SE = 12,4 mm
E = 12,0 +/- 0,3 mm
k = 0,7 +/- 0,2 mm

M8 X 18,0 mm	0,5 - 3,5 mm	XQL M8X18.0	250	36,0 Nm	7180 N	11850 N	

M 10

SW = 13 mm
SW1 = 13,1 mm
SE = 14,7 mm
E = 15,0 +/- 0,3 mm
k = 0,7 +/- 0,2 mm

M10 X 23,0 mm	1,0 - 4,0 mm	XQL M10X23.0	250	70,0 Nm	9650 N	17200 N	



WUXI ANSHIDA HARDWARE CO.,LTD.