


Blind Rivet Nuts (Inserts) Flat Head

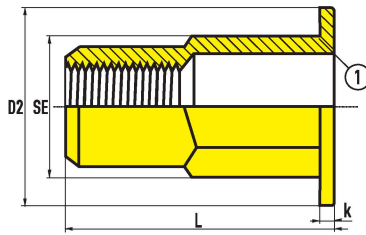

① Semi-hexagonal shank open type

① Steel zinc plated

M 4

SW = 5,9 mm
 SW1 = 6 mm (SW + 0,1 mm)
 SE = 6,8 mm
 D2 = 9,0 +/- 0,3 mm
 k = 0,8 +/- 0,2 mm

M4 X 11,0 mm	0,5 - 2,0 mm	PBL M4X11.0	250	4,0 Nm	2710 N	3700 N	

M 5

SW = 6,9 mm
 SW1 = 7 mm (SW + 0,1 mm)
 SE = 7,9 mm
 D2 = 10,0 +/- 0,3 mm
 k = 1,0 +/- 0,2 mm

M5 X 13,5 mm	0,5 - 2,5 mm	PBL M5X13.5	250	6,0 Nm	3320 N	5950 N	

M 6

SW = 8,9 mm
 SW1 = 9 mm (SW + 0,1 mm)
 SE = 10,2 mm
 D2 = 12,7 +/- 0,3 mm
 k = 1,5 +/- 0,2 mm

M6 X 15,0 mm	0,5 - 3,0 mm	PQL M6X15.0	250	10,8 Nm	4250 N	9300 N	

M 8

SW = 10,9 mm
 SW1 = 11 mm (SW + 0,1 mm)
 SE = 12,4 mm
 D2 = 15,0 +/- 0,3 mm
 k = 1,5 +/- 0,2 mm

M8 X 18,0 mm	0,5 - 3,5 mm	PQL M8X18.0	250	23,8 Nm	7500 N	12350 N	

