


Blind Rivet Nuts (Inserts) reduced Head

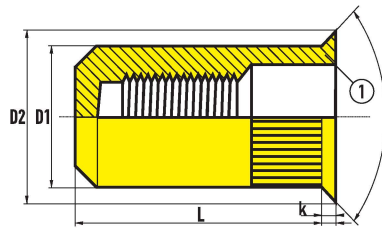

120° Round shank knurled closed type

① Steel zinc plated

M 4

D1 = 5,9 mm
D2 = 6,8 +/- 0,3 mm
k = 0,5 +/- 0,2 mm
L = +/- 0,2 mm

= 6 mm

M4 X 17,0 mm	1,0 - 2,5 mm	XZF M4X17.0	250	4,0 Nm	2100 N	6000 N	

M 5

D1 = 6,9 mm
D2 = 8,2 +/- 0,3 mm
k = 0,5 +/- 0,2 mm
L = +/- 0,2 mm

= 7 mm

M5 X 18,0 mm	1,0 - 2,5 mm	XZF M5X18.0	250	8,0 Nm	2600 N	10500 N	

M 6

D1 = 8,9 mm
D2 = 10,5 +/- 0,3 mm
k = 0,6 +/- 0,2 mm
L = +/- 0,2 mm

= 9 mm

M6 X 23,0 mm	1,5 - 3,0 mm	XZF M6X23.0	250	15,0 Nm	3800 N	16500 N	

M 8

D1 = 10,9 mm
D2 = 12,4 +/- 0,3 mm
k = 0,7 +/- 0,2 mm
L = +/- 0,2 mm

= 11 mm

M8 X 23,5 mm	1,5 - 3,0 mm	XZF M8X23.5	250	26,0 Nm	5400 N	24000 N	