


Sealed Blind Rivets Domed Head

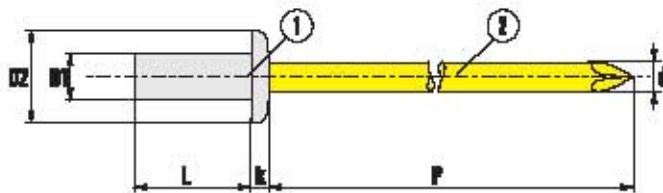

- ① Aluminium AIMg 5
- ② Steel with protection layer

Ø 3.2 mm

D1 = 3,2 +/- 0,08 mm

D2 = 6,0 +/- 0,24 mm

k = ≤ 1,4 mm

d = 1,75 mm

P = ≥ 27 mm

L = +1/-0,2 mm

= 3,3 mm

3,2 x 6,5 mm	0,5 - 2,0 mm	ASD 32600 CE	1000	1070 N	1245 N
3,2 x 8,0 mm	2,0 - 3,5 mm	ASD 32800 CE	1000		
3,2 x 9,5 mm	3,5 - 5,0 mm	ASD 32900 CE	1000		
3,2 x 10,5 mm	5,0 - 6,5 mm	ASD 32100 CE	1000		
3,2 x 12,5 mm	6,5 - 8,0 mm	ASD 32120 CE	1000		

Ø 4.0 mm

D1 = 4,0 +/- 0,08 mm

D2 = 8,0 +/- 0,29 mm

k = ≤ 1,7 mm

d = 2,15 mm

P = ≥ 27 mm

L = +1/-0,2 mm

= 4,1 mm

4,0 x 8,0 mm	0,5 - 3,5 mm	ASD 40800 CE	1000	1710 N	2240 N
4,0 x 9,5 mm	3,5 - 4,5 mm	ASD 40950 CE	500		
4,0 x 11,0 mm	4,5 - 6,5 mm	ASD 40110 CE	500		
4,0 x 12,5 mm	6,5 - 8,0 mm	ASD 40120 CE	500		
4,0 x 15,0 mm	8,0 - 10,5 mm	ASD 40150 CE	500		

Ø 4.8 mm

D1 = 4,8 +/- 0,08 mm

D2 = 9,5 +/- 0,29 mm

k = ≤ 2,0 mm

d = 2,63 mm

P = ≥ 27 mm

L = +1/-0,2 mm

= 4,9 mm

4,8 x 8,0 mm	1,0 - 3,0 mm	ASD 48800 CE	500	2230 N	3070 N
4,8 x 9,5 mm	3,0 - 4,5 mm	ASD 48950 CE	500		
4,8 x 11,0 mm	4,5 - 6,0 mm	ASD 48110 CE	250		
4,8 x 12,5 mm	6,0 - 7,5 mm	ASD 48125 CE	250		
4,8 x 14,0 mm	7,5 - 9,0 mm	ASD 48140 CE	250		
4,8 x 16,0 mm	9,0 - 11,0 mm	ASD 48160 CE	250		
4,8 x 18,0 mm	11,0 - 13,0 mm	ASD 48180 CE	250		
4,8 x 21,0 mm	13,0 - 16,0 mm	ASD 48210 CE	250		
4,8 x 25,0 mm	16,0 - 20,0 mm	ASD 48250 CE	250		

Ø 6.4 mm

D1 = 6,4 +/- 0,11 mm

D2 = 12,7 +/- 0,35 mm

k = ≤ 2,5 mm

d = 3,7 mm

P = ≥ 31 mm

L = +1/-0,2 mm

= 6,5 mm

6,4 x 12,5 mm	1,5 - 6,0 mm	ASD 64125 CE	250	3950 N	5000 N
6,4 x 16,0 mm	6,0 - 8,0 mm	ASD 64160 CE	250		