


Sealed Blind Rivets Large Head

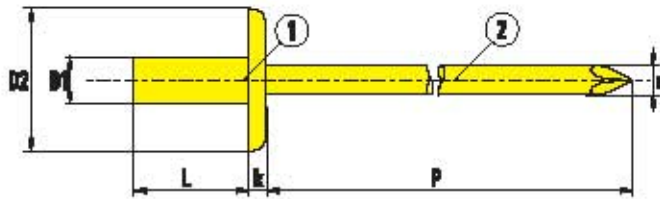

- ① Steel zinc plated
- ② Steel zinc plated

Ø 3,2 mm D2 = 10,0 mm

$D1 = 3,2 + 0,08 / - 0,10$ mm
 $D2 = 10,0 + / - 0,29$ mm
 $k = 1,0 + / - 0,3$ mm
 $d = 1,9$ mm
 $P \geq 27$ mm
 $L = +1 / - 0,2$ mm
 = 3,3 mm

3,2 x 8,0 mm	1,5 - 3,0 mm	SSL 32800 CE	1000	1600 N	2200 N
3,2 x 10,0 mm	3,0 - 5,0 mm	SSL 32100 CE	1000		
3,2 x 12,0 mm	5,0 - 7,0 mm	SSL 32120 CE	1000		

Ø 4,0 mm D2 = 12,0 mm

$D1 = 4,0 + 0,08 / - 0,10$ mm
 $D2 = 12,0 + / - 0,35$ mm
 $k = 1,2 + / - 0,3$ mm
 $d = 2,3$ mm
 $P \geq 27$ mm
 $L = +1 / - 0,2$ mm
 = 4,1 mm

4,0 x 8,0 mm	1,5 - 3,0 mm	SSL 40800 CE	500	2300 N	2500 N
4,0 x 10,0 mm	3,0 - 5,0 mm	SSL 40100 CE	500		
4,0 x 12,0 mm	5,0 - 6,5 mm	SSL 40120 CE	500		
4,0 x 16,0 mm	6,5 - 10,5 mm	SSL 40160 CE	500		

Ø 4,8 mm D2 = 14,0 mm

$D1 = 4,8 + 0,08 / - 0,10$ mm
 $D2 = 14,0 + / - 0,35$ mm
 $k = 1,4 + / - 0,3$ mm
 $d = 2,9$ mm
 $P \geq 27$ mm
 $L = +1 / - 0,2$ mm
 = 4,9 mm

4,8 x 8,0 mm	0,5 - 3,0 mm	SSL 48800 CE	250	2900 N	3800 N
4,8 x 10,0 mm	3,0 - 5,0 mm	SSL 48100 CE	250		
4,8 x 12,0 mm	5,0 - 6,5 mm	SSL 48120 CE	250		
4,8 x 16,0 mm	6,5 - 10,5 mm	SSL 48160 CE	250		