


Blind Rivet Nuts (Inserts) Flat Head



Hexagonal shank
open type

① Steel zinc plated

M 4

SW = 6 mm
SW1 = 6,1 mm
SE = 6,8 mm
D2 = 9,0 +/- 0,3 mm
k = 0,8 +/- 0,2 mm

M4 X 11,0 mm	0,5 - 2,0 mm	PQL M4X11.0	250	5,0 Nm	2740 N	7500 N	

M 5

SW = 7 mm
SW1 = 7,1 mm
SE = 7,9 mm
D2 = 10,0 +/- 0,3 mm
k = 1,0 +/- 0,2 mm

M5 X 14,0 mm	0,5 - 3,0 mm	PQL M5X14.0	250	6,8 Nm	3460 N	9780 N	

M 6

SW = 9 mm
SW1 = 9,1 mm
SE = 10,2 mm
D2 = 12,7 +/- 0,3 mm
k = 1,5 +/- 0,2 mm

M6 X 16,0 mm	0,5 - 3,0 mm	PQL M6X16.0	250	20,0 Nm	4350 N	10250 N	

M 8


SW = 11 mm
SW1 = 11,1 mm
SE = 12,4 mm
D2 = 15,5 +/- 0,3 mm
k = 1,5 +/- 0,2 mm

M8 X 18,0 mm	0,5 - 3,0 mm	PQL M8X18.0	250	39,0 Nm	8400 N	12700 N	

M 10

SW = 13 mm
SW1 = 13,1 mm
SE = 14,7 mm
D2 = 18,0 +/- 0,3 mm
k = 1,7 +/- 0,2 mm

M10 X 21,0 mm	1,0 - 3,5 mm	PQL M10X21.0	250	70,0 Nm	9650 N	17200 N	

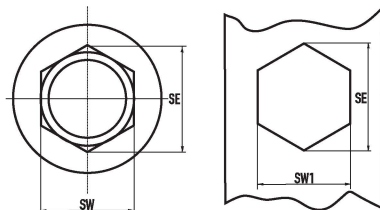

WUXI ANSHIDA HARDWARE CO.,LTD.