


Blind Rivet Nuts (Inserts) reduced Head

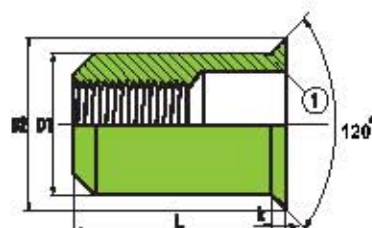

Round shank
open type

① Stainless steel A2 [AISI 304]

M 4

D1 = 5,9 mm
D2 = 7,9 ± 0,3 mm
k = 0,5 ± 0,2 mm
L = ± 0,2 mm
 = 6 mm

M4 X 11,0 mm	0,5 - 2,0 mm	XYB M4X11.0	250	3,0 Nm	3300 N	6000 N	

M 5

D1 = 6,9 mm
D2 = 8,2 ± 0,3 mm
k = 0,5 ± 0,2 mm
L = ± 0,2 mm
 = 7 mm

M5 X 13,0 mm	0,5 - 2,0 mm	XYB M5X13.0	250	3,0 Nm	4810 N	9800 N	

M 6

D1 = 8,9 mm
D2 = 10,5 ± 0,3 mm
k = 0,6 ± 0,2 mm
L = ± 0,2 mm
 = 9 mm

M6 X 15,0 mm	0,5 - 3,0 mm	XYB M6X15.0	250	13,1 Nm	6140 N	14150 N	

M 8

D1 = 10,9 mm
D2 = 12,4 ± 0,3 mm
k = 0,7 ± 0,2 mm
L = ± 0,2 mm
 = 11 mm

M8 X 17,0 mm	0,5 - 3,0 mm	XYB M8X17.0	250	22,0 Nm	9320 N	18670 N	

M 10

D1 = 11,9 mm
D2 = 14,6 ± 0,3 mm
k = 0,8 ± 0,2 mm
L = ± 0,2 mm
 = 12 mm

M10 X 19,0 mm	0,5 - 3,0 mm	XYB M10X19.0	250	36,0 Nm	10010 N	26400 N	