


Sealed Blind Rivets Domed Head

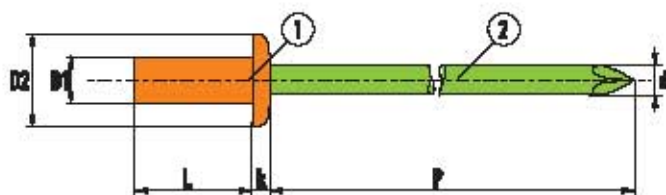

- ① Copper alloy
- ② Stainless steel A2 [AISI 304]

Ø 3,2 mm

$D1 = 3,2 + 0,08 / - 0,10 \text{ mm}$

$D2 = 6,0 + / - 0,24 \text{ mm}$

$k = \leq 1,4 \text{ mm}$

$d = 1,75 \text{ mm}$

$P \geq 27 \text{ mm}$

$L = +1 / - 0,2 \text{ mm}$

= 3,3 mm

3,2 x 6,5 mm	0,5 - 2,0 mm	CBD 32650 CE	1000	850 N	1300 N
3,2 x 8,0 mm	2,0 - 3,5 mm	CBD 32800 CE	1000		
3,2 x 9,5 mm	3,5 - 5,0 mm	CBD 32900 CE	1000		
3,2 x 12,5 mm	5,0 - 8,0 mm	CBD 32125 CE	1000		

Ø 4,0 mm

$D1 = 4,0 + 0,08 / - 0,15 \text{ mm}$

$D2 = 8,0 + / - 0,29 \text{ mm}$

$k = \leq 1,7 \text{ mm}$

$d = 2,2 \text{ mm}$

$P \geq 27 \text{ mm}$

$L = +1 / - 0,2 \text{ mm}$

= 4,1 mm

4,0 x 8,0 mm	0,5 - 3,5 mm	CBD 40800 CE	500	1350 N	2000 N
4,0 x 10,0 mm	3,5 - 5,0 mm	CBD 40100 CE	500		